
A2412 OP





The overflow tube is available in 212mm-347mm.




Half adjusting float up, half flush volume decreases. Float down, flush volume increases.



Full adjustor up, full flush volume decreases. Full adjustor down, full flush volume increases.



Reliable & Trustworthy

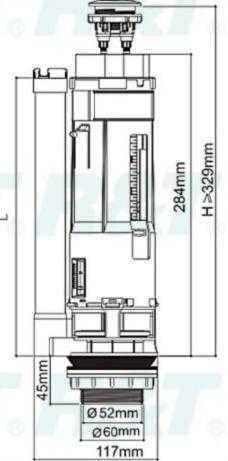

	A2412 Dual Flush Valve			
	Outlet diameter		2"	
	Adaptable to tanks with height		329-429mm	
	Flush speed	Half flush	2.5-3.1L/S	One-piece base with V-type buckl
		Full flush	2.2-2.6L/S	
	Residual water level range	Half flush	108-172mm	
		Full flush	48-82mm	two-piece base
	Toilets configuration		One-piece, Two-piece	Wide variety of
	Overflow pipe		Available for requested height	

Refill tube connector is used for









two-piece base \$\phi47\$ Two-piece base



Wide variety of lock nuts available